

Low Voltage PVC Control Cables

1kV 12 core Armoured

Description: 12 Core Cu PVC FRPVC SWA FRPVC, 1000 V
12 Core Cu PVC LHFRPVC SWA LHFRPVC, 1000 V

F4CC Annn ZZ 111 0K0S
F4CC Annn ZZ 212 0K0S

Specification: SANS 1507

Last updated: January 2026


| PHYSICAL | ...Annn... | A915 | A925 | A004 |
|---------------------------|---------------------|--------|-------|-------|
| Conductor size | mm ² nom | 1,5 | 2,5 | 4 |
| Conductor diameter | mm app | 1,6 | 2,1 | 2,6 |
| Insulation diameter | mm app | 3,2 | 3,7 | 4,6 |
| Bedding diameter | mm app | 16,5 | 18,5 | 22,4 |
| Armour diameter | mm app | 19,0 | 21,0 | 24,9 |
| Cable diameter | mm app | 22,4 | 24,6 | 28,5 |
| Length of cable on a drum | m | 500 | 500 | 500 |
| Cable mass (approximate) | kg/m app | 1,0 | 1,2 | 1,6 |
| Gross mass on drum | kg app | 517 | 634 | 859 |
| Bending radius | mm min | 224 | 246 | 285 |
| ELECTRICAL | | | | |
| DC Resistance @ 20 °C | Ω/km | 12,100 | 7,410 | 4,610 |
| AC Resistance @ 70 °C | Ω/km | 14,478 | 8,866 | 5,516 |
| Reactance X+ | Ω/km | 0,119 | 0,106 | 0,106 |
| Impedance Z+ | Ω/km | 14,478 | 8,867 | 5,517 |
| CURRENT RATINGS | | | | |
| Ground | Amps | 15 | 19 | 25 |
| 110 Ducts in ground | Amps | 12 | 15 | 20 |
| Air in Shade | Amps | 13 | 17 | 23 |
| Air in sunlight | Amps | 10 | 13 | 18 |
| SHORT CIRCUIT RATING | | | | |
| Symmetrical (160 °C) | kA (1 sec) | 0,17 | 0,29 | 0,46 |
| Earth fault (160 °C) | kA (1 sec) | 2,44* | 2,72* | 3,26* |
| (Three Phase) Volt Drop | mV/A/m | 25,1 | 15,4 | 9,6 |

* In practice the earth fault rating must be limited to symmetrical fault rating,

Note ratings assume that all conductors carry equal currents simultaneously

The current ratings above are based on standard laying conditions for a single circuit in isolation as follows:

Conductor temperature = 70 °C
Soil thermal resistivity = 1,2 K·m/W
Soil temperature = 25 °C
Air temperature = 30 °C
Depth of burial = 500 mm
5% tolerance on dimensions

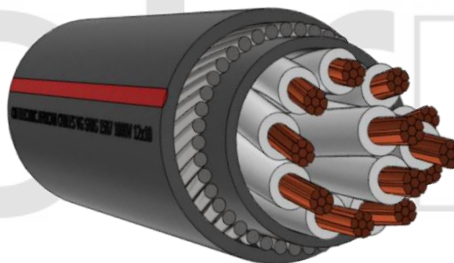

DISCLAIMER: CBI reserves the right to change product specifications from time to time to effect improvements and /or enhancements and accepts no liability arising from any difference between the published parameters of this data sheet and the finished product, unless by prior written agreement,

POWER BY INNOVATION... INNOVATION THROUGH PARTNERSHIPS

CBI-electric: african cables | a division of ATC (Pty) Ltd | Registration No, 1955/003773/07
PO Box 172, Vereeniging 1930 | Steel Road, Peacehaven, Vereeniging, 1939, South Africa
Tel: +27 16 430 6000 | www.cbi-electric.com | Member of the REUNERT Group | B-BBEE Level 1
ISO 9001 | ISO 14001 | ISO 45001