

# Low Voltage 2 Core XLPE Bells Cables

## 1kV Armoured

**Description:** 2 Core Cu XLPE FRPVC SWA FRPVC, 1000 V F2CC 2nnn ZZ 111 0K0S (Red Stripe)  
2 Core Cu XLPE LHFRPVC SWA LHFRPVC, 1000 V F2CC 2nnn ZZ 212 0K0S (Blue Stripe)

**Specification:** SANS 1507


*Last updated: January 2026*

PHYSICAL	... naaa ...	2915	2925	2004	2006	2010	2016
Conductor size	mm <sup>2</sup> nom	1,5	2,5	4	6	10	16
Conductor diameter	mm app	1,6	2,0	2,6	3,1	3,9	4,8
Insulation diameter	mm app	3,0	3,4	4,0	4,5	5,3	6,2
Bedding diameter	mm app	7,8	8,6	9,7	10,8	12,4	14,3
Armour diameter	mm app	9,6	10,4	11,5	12,6	14,2	16,1
Cable diameter	mm app	12,6	13,7	14,8	15,8	17,5	19,5
Length of cable on a drum	m	500	500	500	500	500	500
Cable mass (approximate)	kg/m app	0,3	0,3	0,4	0,5	0,6	0,8
Gross mass on drum	kg app	166	189	220	253	324	427
Bending radius	mm min	126	137	148	158	175	195
ELECTRICAL							
DC Resistance @ 20 °C	Ω/km	12,100	7,410	4,610	3,080	1,830	1,150
AC Resistance @ 90 °C	Ω/km	15,429	9,449	5,878	3,927	2,334	1,467
Reactance X+	Ω/km	0,069	0,065	0,065	0,065	0,065	0,065
Impedance Z+	Ω/km	15,429	9,449	5,879	3,928	2,334	1,468
Capacitance C+	µF/km	0,153	0,170	0,191	0,209	0,234	0,260
Resistance Ro	Ω/km	46,968	39,067	32,165	28,190	23,323	19,976
Reactance Xo	Ω/km	0,394	0,356	0,335	0,314	0,298	0,281
CURRENT RATINGS							
Ground	Amps	34	45	59	74	99	127
Ducts in ground	Amps	28	37	48	60	80	104
Air in Shade	Amps	29	39	51	65	88	116
Air in sunlight	Amps	26	34	45	57	78	102
SHORT CIRCUIT RATING							
Symmetrical (250 °C)	kA (1 sec)	0,2	0,4	0,6	0,9	1,4	2,3
Earth fault (200 °C)	kA (1 sec)	0,9	1,0	1,1	1,2	1,4	1,5
Single Phase Volt drop	mV/A/m	30,9	18,9	11,8	7,9	4,7	2,9

\* In practice the earth fault rating must be limited to symmetrical fault rating.

**The current ratings above are based on standard laying conditions for a single circuit in isolation as follows:**

Conductor temperature = 90 °C  
Soil thermal resistivity = 1,2 K·m/W  
Soil temperature = 25 °C  
Air temperature = 30 °C  
Depth of burial = 500 mm  
5% tolerance on dimensions

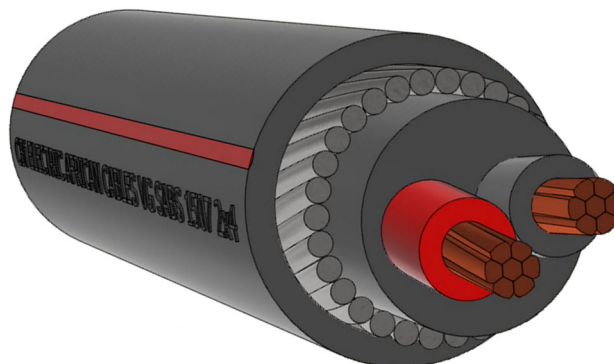

**POWER BY INNOVATION... INNOVATION THROUGH PARTNERSHIPS**